


CheXpress® CX30

The Secure Choice®



The award-winning CheXpress CX30 is the only bank-quality check scanner offered at a small business price. This stylish and quiet single-feed scanner is the perfect device for lower volume check capture environments.

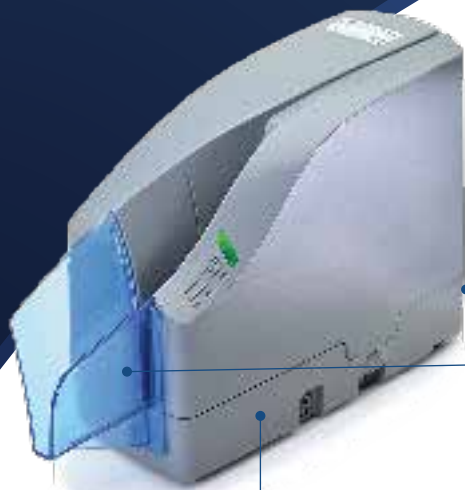

SINGLE FEED OPERATION

At a rated speed of one second per scan the CX30 makes quick work of any deposit.



PASS THROUGH FEED OPERATION

Users can choose between "scan and return" or "pass through" scan modes. With "pass through", scanned items follow a straight paper path and exit through the rear of the scanner.

SMALL FOOTPRINT

The CX30's economical footprint and flexible cable management system means you won't have an issue finding it a home in your work space.

KEY FEATURES & BENEFITS

- **Single Feed Fast and Quiet Scanning**
- **1-Line Inkjet Endorser Option**
- **Simple to Operate**
- **Built to Last**
- **Optional Ultraviolet Image Capture**
- **E13B and CMC7 MICR Recognition with Auto-Detect and integrated E13B Optical Recognition Assist**
- **Low Maintenance**



Affordable Fast Quality Scanning

The CX30 delivers fast quality scanning at an affordable price point. At one second per scan it can keep processing scanned images as fast as you can load the checks in the scanner.



Secure & Reliable

The CX30's reputation for reliability and ultimate security make it the solution of choice for banks and RDC customers around the world. The CX30 is engineered to last and will process over a million items during its lifespan, making it the highest duty cycle of any scanner in its class.



Quality Image & MICR Capture

Featuring high performance front and rear image sensors with dual pass MICR read-head capability, the CX30 is truly in a class of its own. Our advanced document handling technologies can handle even the most challenging money orders and checks.



CheXpress® CX30

Scanner Specifications



Scanner Dimensions

Height: 7.47 in (18.97 cm)
Width: 3.92 in (9.96 cm)
Length: 9.38 in (23.83 cm)
Weight: 3.95 lbs. (1.80 kg)

Document Input and Output Pockets

Entry Pocket: 1 item
Double document detection
Exit Pocket: Up to 5 items

Document Handling

Document Height: 2.12 in - 4.25 in (54 - 108 mm)
Image Capture Height: Up to 4.17 in (106 mm)
Document Length: 3.19 in - 8.98 in (81- 228 mm)
Document Weight: 16 - 28 lb. bond (60 - 105 gsm)
Document Thickness: 0.0032 in - 0.0058 in
(0.081 - 0.147 mm)

MICR Recognition

(Magnetic Ink Character Recognition) for E13B and CMC7
Optical Character Recognition to enhance MICR Read,
further enhanced using DCC's Best Read™ API function

Endorsement Option

User-replaceable cartridge (96 dpi printing, 1-line)

Image Sensor

Resolution: 300 dpi
Light Source: Tri-Color LEDs
Optional Front Ultraviolet (UV) Image Sensor

Franker Option

User replaceable frank roller

Image Compression Standards

JPEG (24 bit color, 8 bit grayscale)
BMP (24 bit color, 4 or 8 bit grayscale)
TIFF Group 4 B/W

Connectivity

Mini-B USB 2.0 cable and power supply included

Application Programming Interfaces (API)

DCC API SecureLink 2.0 API (Requires SecureLink
Appliance)

Supported Operating Systems

Windows 11, Windows 10 (32/64 bit)
macOS

Standard Warranty

1 year depot warranty

Electrical

Power Consumption: 24 Watts
Input Voltage: 100 to 240 VAC, 50/60 Hz
Separate Standard Power Supply: Auto sensing for
voltage

Environmental

Operating Temperature: 60° - 90° F (15° - 32° C)
Operating Humidity: 35 - 85% non-condensing

Certifications

Safety: UL, cUL, CE
FCC: Class B (Industrial, Business or Home)
EMC: IEC CE
Efficiency: CEC V 115V - Power Supply
RoHS Compliant

Part Numbers

152000-01 CX30 (Standard Model)
152000-02 CX30-IJ (Standard Model with Endorsement Option)
152001-01 CX30-F (Standard Model with Franker Option)
152001-02 CX30-IJ-F (Standard Model with Endorsement and Franker Option)
152005-02 CX30-IJ-UV (Standard Model with UV and Endorsement Option)

